

TRU 
BOND

Strong Adhesive, Strong Bond



Polymer Modified TILE ADHESIVE

TB 151


20kg NET WEIGHT



AREAS OF APPLICATION

TRUBOND TB 151 is a general purpose polymer modified cementitious grey coloured tile adhesive to fix high porosity ceramic tiles on internal floor and wall. It is ready to use tile fixing adhesive and needs no curing.

- High Porosity Tiles on Wall & Floor
- Vitrified Tiles on the Floor
- New Tiling in internal Areas
- Tile on Tile

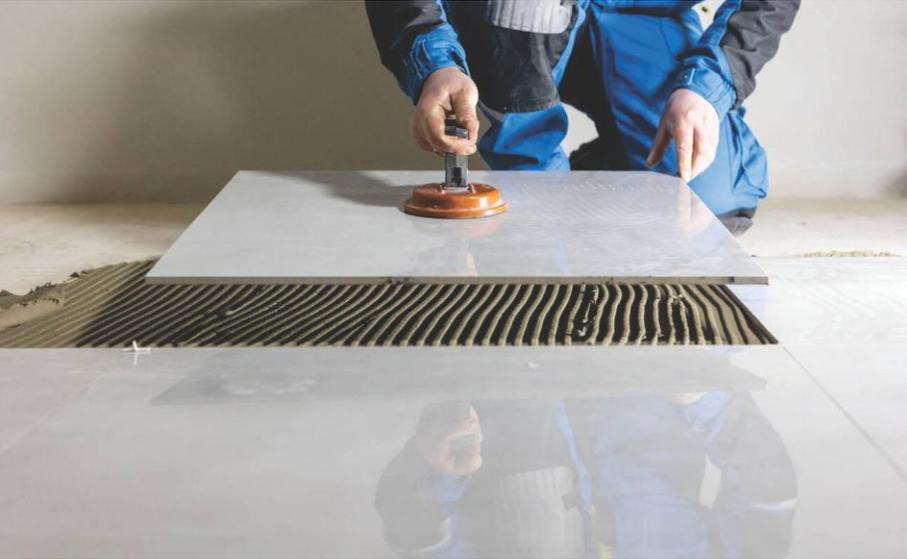

TB 151

Polymer Modified
TILE ADHESIVE

BENEFITS

- Polymer Modified Additives
- High Bond Strength Ready to use
- Self Curing Good Pot Life
- Applicator Friendly
- Higher Coverage

SHELF LIFE : 1 Year From The Date of Mfg.

Conforms to : IS 15477:2019 Type - 1 | EN 12004 C1 T

TECHICAL SPECIFICATIONS

Packaging Size : 20 kg Bag

PARAMETERS	Appearance	Pot Life	Open Time	Tensile Adhesion (28 days)	Shear Adhesion (28 days)	Coverage (20 Kg Bag)
SPECIFICATION	Grey Powder	>60 Minutes	>20 Minutes	0.50 MPa	1.00 MPa	30-35 Sq.Ft. @3mm Bed Thickness



Polymer Modified TILE ADHESIVE

TB 251

20kg NET WEIGHT



AREAS OF APPLICATION

TRUBOND TB 251 is a polymer modified adhesive to fix all type of tiles on the floor and wall. It forms a waterproof barrier between two surfaces and has excellent grab properties.

- Wall Application 2X4 upto 15 ft.
- Small window Framing
- Tile On Tile
- Indoor & Outdoor



TB 251

Polymer Modified
TILE ADHESIVE

BENEFITS

- Polymer Modified Additives
- High Bond Strength Ready to use
- Ready to use Self Curing
- Long Lasting Low VOC Applicator Friendly
- Higher Coverage

SHELF LIFE : 1 Year From The Date of Mfg.

Conforms to : IS 15477:2019 Type - 1 | EN 12004 C2 T

TECHICAL SPECIFICATIONS

Packaging Size : 20 kg Bag

PARAMETERS	Appearance	Pot Life	Open Time	Tensile Adhesion (28 days)	Shear Adhesion (28 days)	Coverage (20 Kg Bag)
SPECIFICATION	Grey/White Powder	>60 Minutes	>20 Minutes	1.00 N/mm ²	1.00 N/mm ²	30-35 Sq.Ft. @3mm Bed Thickness



Polymer Modified TILE ADHESIVE

TB 351

20kg NET WEIGHT

- Water Resistant
- UV Resistance
- Chemical resistance



AREAS OF APPLICATION

TRUBOND TB 351 is a Special Purpose polymer modified cementitious grey/white coloured tile adhesive to fix low porosity ceramic tiles and natural stone on internal & external floor and wall. It is ready to use tile fixing adhesive and needs no curing.

- Marble, Granite, Large Size Tiles
- Door & Window Framing
- Up to 40 ft Wall Application
- Indoor & Outdoor



TB 351

Polymer Modified
TILE ADHESIVE

BENEFITS

- Ready to use
- Polymer Modified Additives
- High Bond Strength
- Self Curing
- Water Resistant
- Higher Coverage
- Applicator Friendly

SHELF LIFE : 1 Year From The Date of Mfg.

Conforms to : IS 15477:2019 Type - 2 | EN 12004 C2 TE

TECHICAL SPECIFICATIONS

Packaging Size : 20 kg Bag

PARAMETERS	Appearance	Pot Life	Open Time	Tensile Adhesion (28 days)	Shear Adhesion (28 days)	Coverage (20 Kg Bag)
SPECIFICATION	Grey/White Powder	>60 Minutes	>30 Minutes	1.25 N/mm ²	1.4 N/mm ²	30-35 Sq.Ft. @3mm Bed Thickness

BLOCK JOINT MORTAR

BLOCK JOINT MORTAR

40kg NET WEIGHT



AREAS OF APPLICATION

TRUBOND BLOCK JOINT MORTAR is a factory prepared blend of carefully selected raw materials, Portland cement and graded aggregates and polymers. Designed for use with water to produce high strength thixotropic mortar, for laying aerated light weight concrete, fly ash bricks, cement hollow blocks, Cellular concrete blocks or smoothing over the block work surface in layers of up to 12mm thickness, that meet and exceed the requirement national and international standards.



BLOCK JOINT MORTAR

AREA OF USE

it can be used on all types of exterior cement plaster /interior walls, asbestos sheets, concrete etc.

SHELF LIFE : 1 Year From The Date of Mfg.

TECHICAL SPECIFICATIONS

Packaging Size : 40 kg Bag

PARAMETERS	Appearance	Pot Life	Open Time	Tensile Adhesion (28 days)	Flexural Strength (280 days)	Water Requirement
SPECIFICATION	Grey Powder	>120 Minutes	>20 Minutes	1.00 N/mm ²	<2.50 Mpa	9-10 Ltr Per 40 Kg



Marketed By :

KALYAN IMPEX

276/1, TP19, Panchewswar road,

Raysan, Gandhinagar - 381007

Email :- Info@trubond.co.in

VISIT US AT

www.trubond.co.in

